








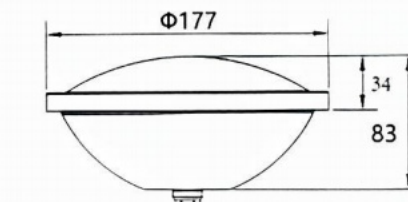

58










59





MODEL:JKD-P38-3A

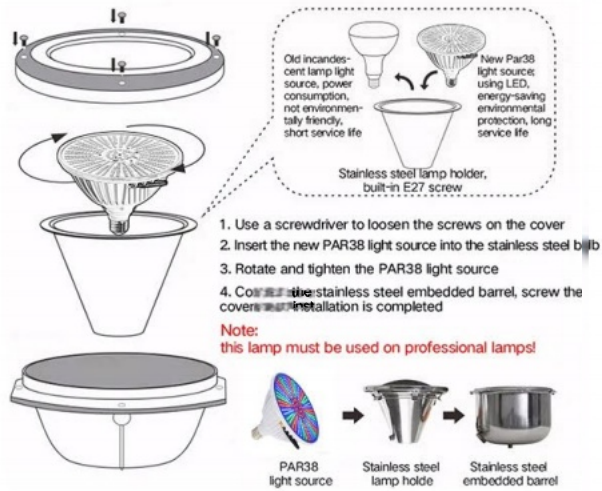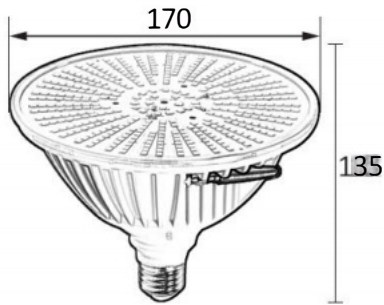

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
P38 Pool Light	JKD-P38-3A	D170*H135	SMD LED	40W	12V/120V	Irradiation area widen The light is downy and No dazzling	ABS



MODEL:JKD-P38-AS

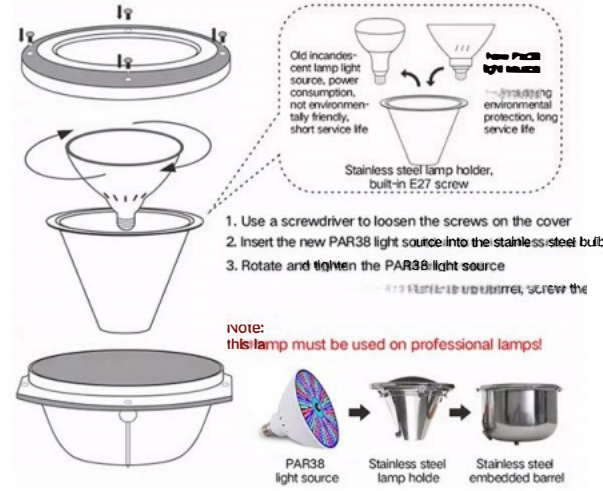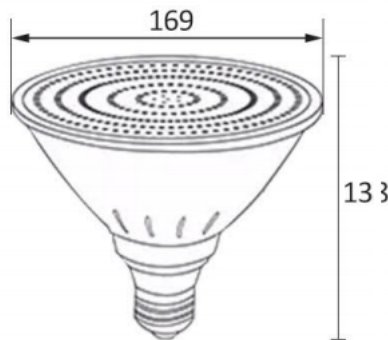

Product	Model	Size(mm)	Light Source	Power	Working Voltage	Luminous color	Body Material
P38 Pool Light	JKD-P38-AS	D169*H138	SMD LED	18W	12V/120V	Irradiation area widen The light is downy and No dazzling	ABS
				25W			
				40W			





JKD-SD-C115



JKD-SD-C135



JKD-SD-C145



JKD-SD-C170



JKD-SD-C190



JKD-SD-C215



JKD-SD-C230



JKD-SD-C250




JKD-SD-C300



MODEL:JKD-SD-B75


MODEL:JKD-SD-B90

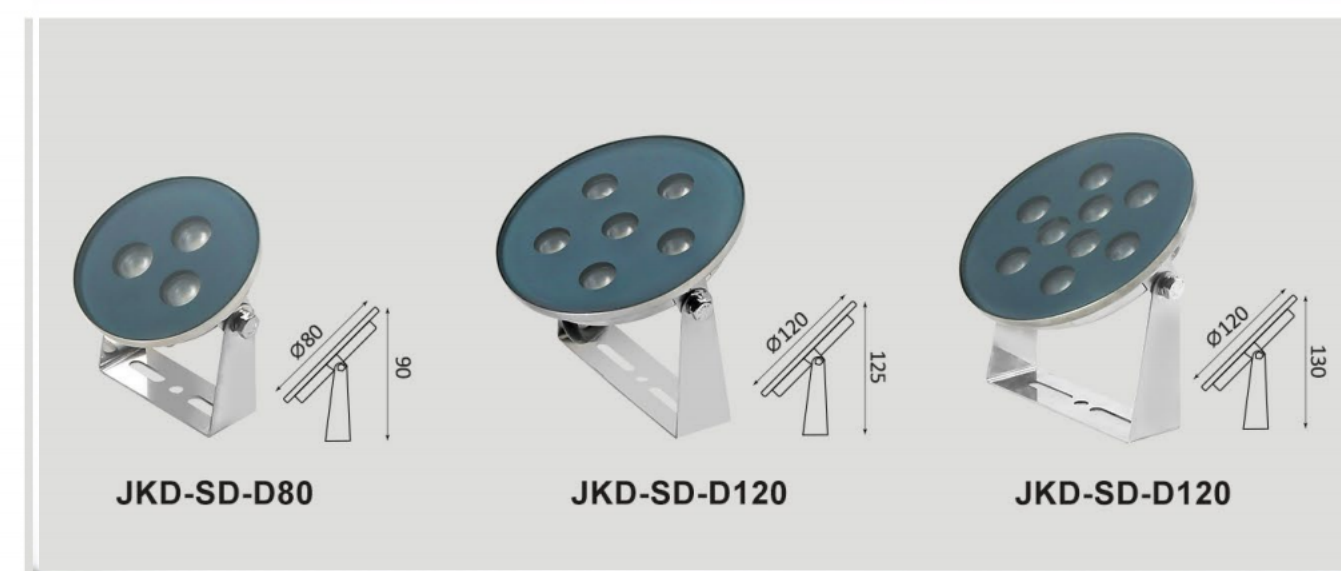

JKD-SD-D80

JKD-SD-D120

JKD-SD-D120

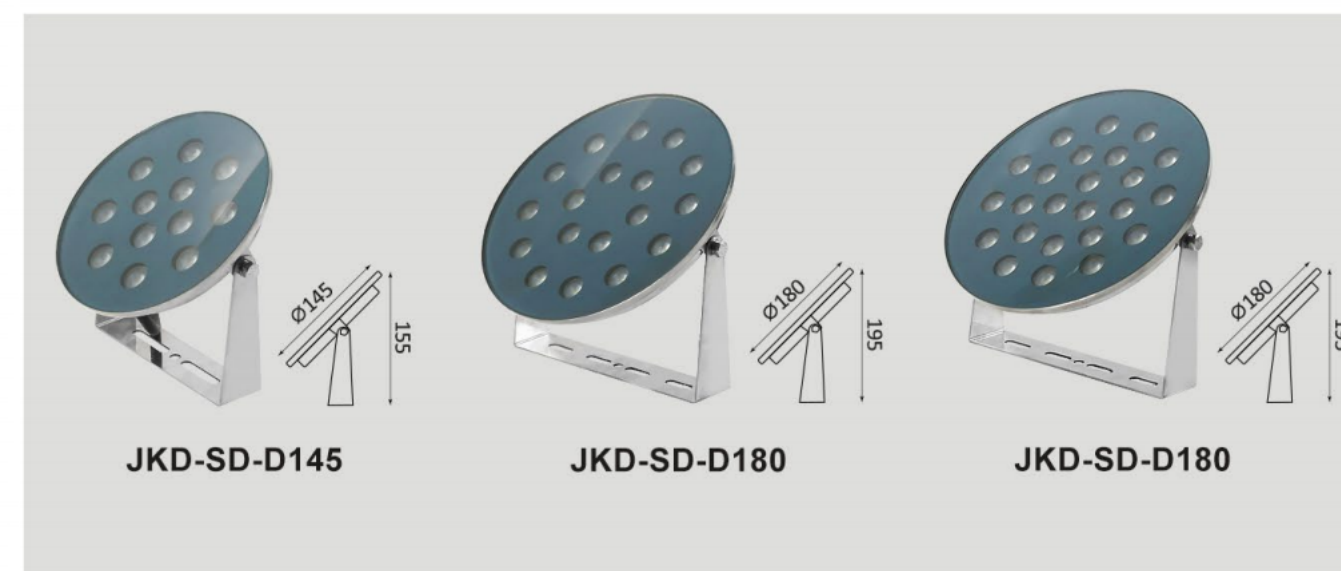



JKD-SD-D145

JKD-SD-D180

JKD-SD-D180



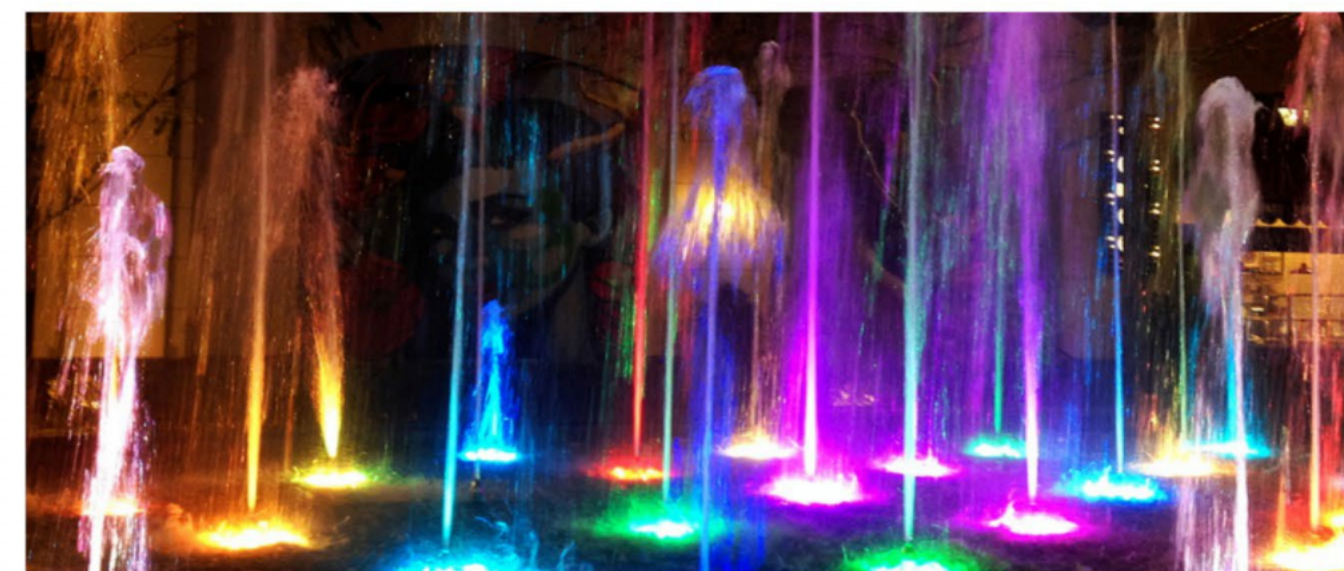

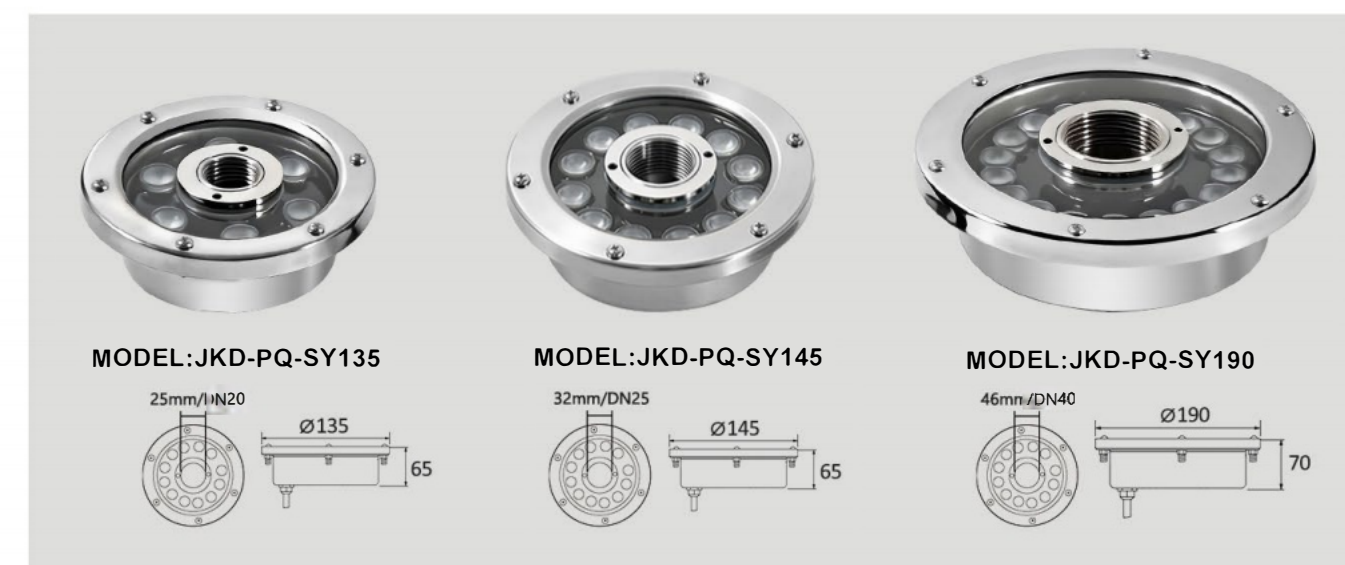



MODEL:JKD-PQ-A163

TWO nozzles are optional
Mushroom shaped fountain and champagne bubble shape



MODEL:JKD-PQ-A180



JKD-PQ-A75

JKD-PQ-A92

JKD-PQ-A163

JKD-PQ-A180



Product	Model	Size(mm)	Middle Hole Dia	Power	Light Source	Working Voltage	Luminous color	Body Material
LED Fountain light	JKD-PQ-A75	D75*H30	20mm / DN15	3W	SMD LED	AC12V	Irradiation long distance and Concentrated light	ABS light + Stainless Steel Nozzle
	JKD-PQ-A92	D92*H27	25mm / DN20	3W				
	JKD-PQ-A163	D163*H47	32mm / DN25	9W				
	JKD-PQ-A180	D180*H47	46mm / DN40	12W				



MODEL:JKD-TQ-S01

MODEL:JKD-TQ-S02



Product	Model	Size(mm)	Water Outlet	Water Inlet	Flow Rate (M3/H)	Pump head	Jet Height	Spa	Power	Voltage	LED Color	Body Material
Jumping jet fountain	JKD-TQ-S01 JKD-TQ-S02	D160*H250	8mm	DN20	2	4	1.2	1	3W	Output : AC/DC 24V Input : AC100-240V	White Warm white Yellow RED Green RGB	Stainless steel
		D219*H380	12mm	DN25	4	10	2.5	2	10W			
		D273*H400	15mm	DN40	5	12	4.5	2.5	10W			
		D325*H450	18mm	DN40	6	15	8	3	10W			



MODEL:JKD-SD-E235


JKD-SD-E235

JKD-SD-E192

JKD-SD-E160

JKD-SD-E135


JKD-SD-E122

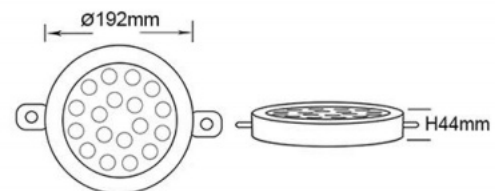

Installation Steps

- 1 Screw the lamp body to the wall of the sink
- 2 The use of underwater cable gland is strongly recommended for AC12V transformer (lamps directly connected to 110V or 220V)

3 Please install the lamp under water under the guidance of a professional

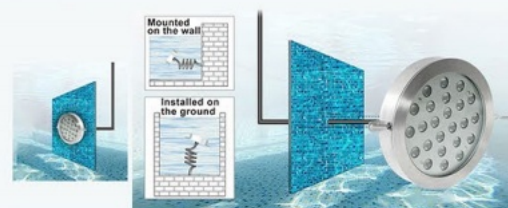

Product	Model	Size(mm)	Power	Light Source	Working Voltage	Luminous color	Body Material
Surface mounted LED Underwater Light	JKD-SD-E122	D122*H44	9W	SMD LED	AC12V	Irradiation long distance and Concentrated light	Stainless steel
	JKD-SD-E135	D135*H44	12W				
	JKD-SD-E160	D160*H44	15W				
	JKD-SD-E192	D192*H44	18W				
	JKD-SD-E235	D235*H44	24W				






MODEL:JKD-DX-SL300



Product	Model	Size(mm)	Power	Light Source	Working Voltage	Luminous color	Body Material
Surface mounted Embedded mounted LED Underwater Light	JKD-DX-SL300	L300*W90*H110	6W/9W	SMD LED	AC12V AC24V	Irradiation long distance and Concentrated light	Stainless steel
	JKD-DX-SL500	L500*W90*H110	12W				
	JKD-DX-SL600	L600*W90*H110	15W				
	JKD-DX-SL1000	L1000*W90*H110	18W/24W/36W				

Two installation methods Suitable for different site needs




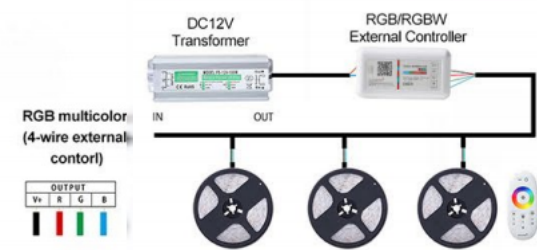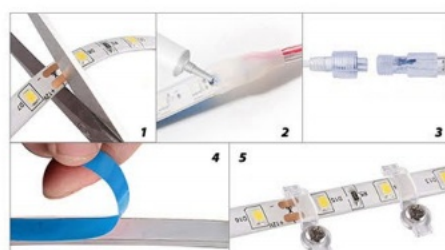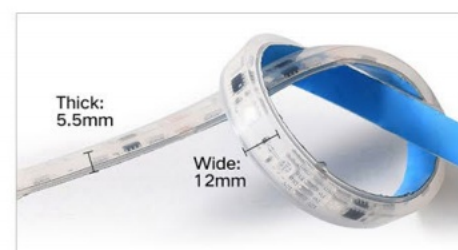

Product	Model	Size(mm)	Length(m)	Power	Working Voltage	Cutting method	LED Chips per meter	Waterproof grade	Body Material
Silicone soft Underwater LED strip light	JKD-DD01	Wide:12 Thick:5.5	12V: 5 Meters/roll 24V 10 Meters/roll	12W /m	DC:2V DC24V	5cm one cut	2835 SMD ; 120 Chips/meter 5050 SMD: 60 Chips/meter	IP68	Silica ge





Product	Model	Power	Working Voltage	Emitting Color	Wire Length	Type of diode	Waterproof grade	Body Material
Underwater Submersible Night Bo Fishing Lights	JKD-JY	13W 20W 30W 60W 100W 200W 300W 400W 500W	AC, DC 12- 4V	White Green Blue Yellow RED	5m	SMD LED	IP68	ABS+ PC +Stainless steel

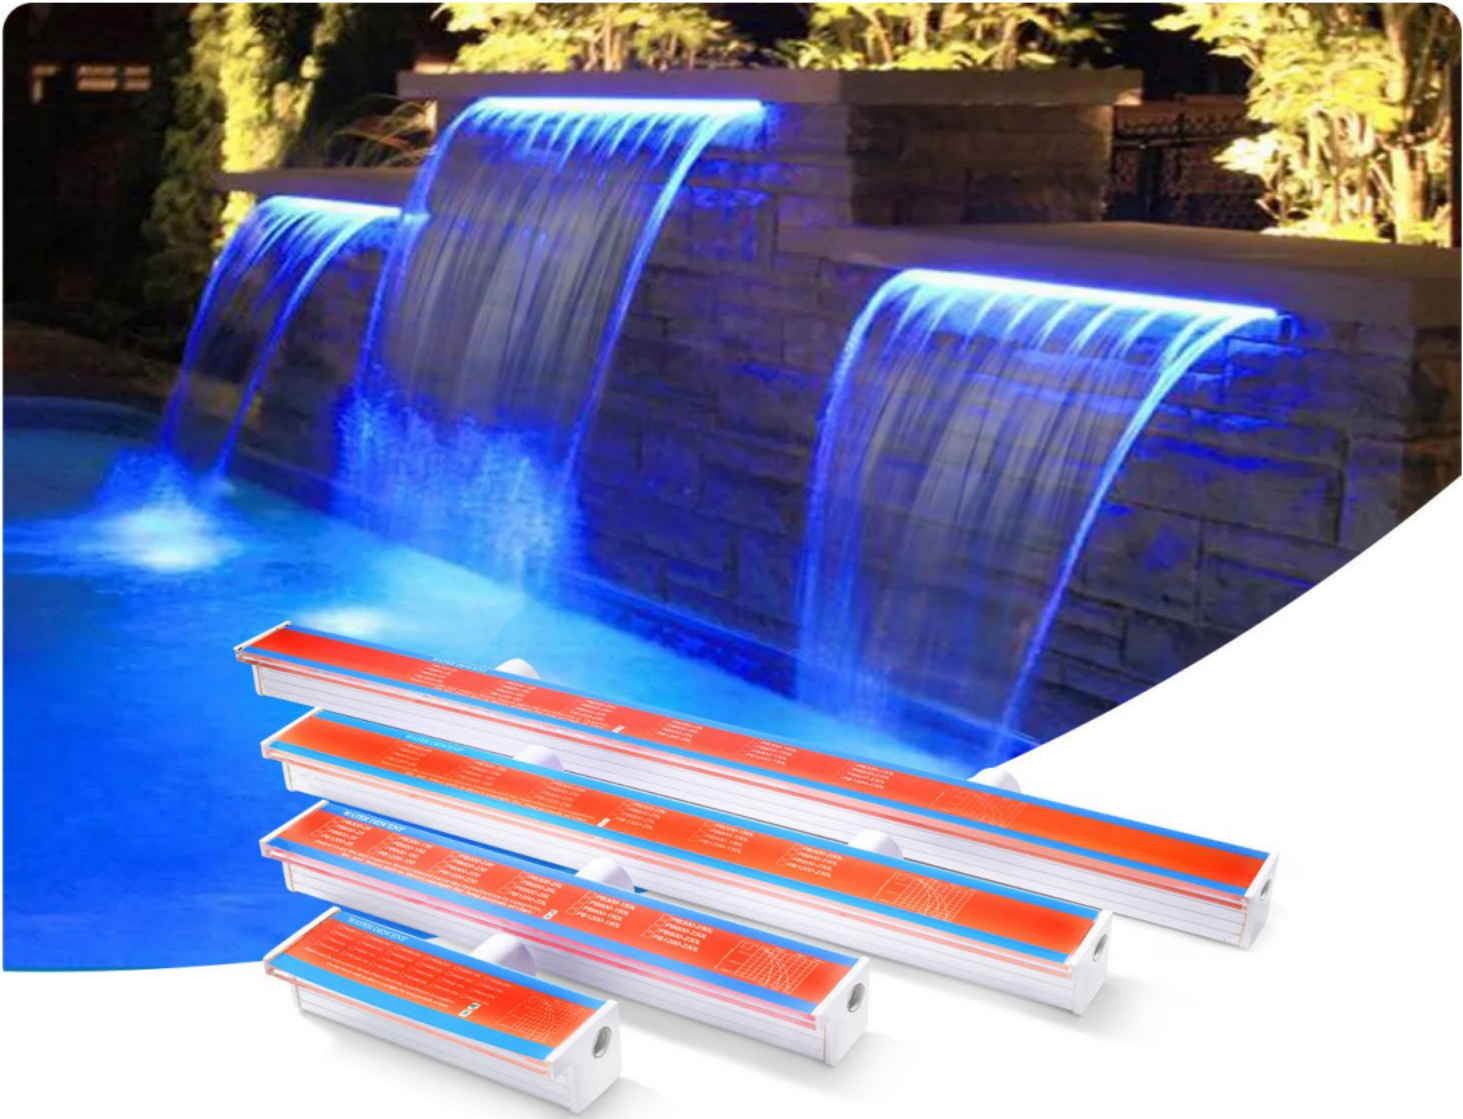

MODEL:JKD-PB

Schematic Diagram

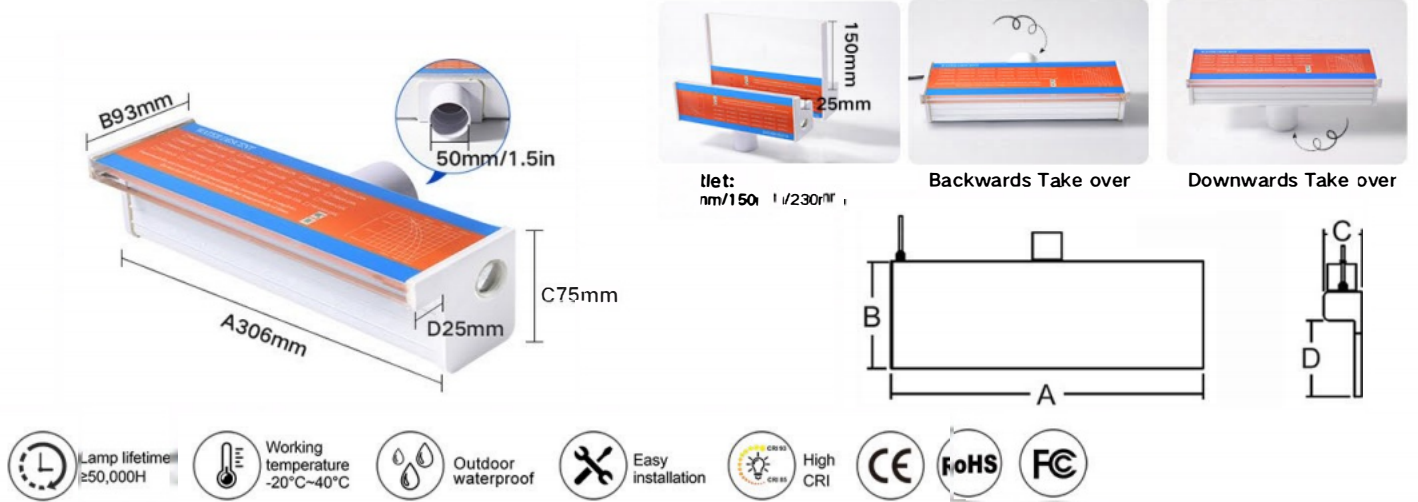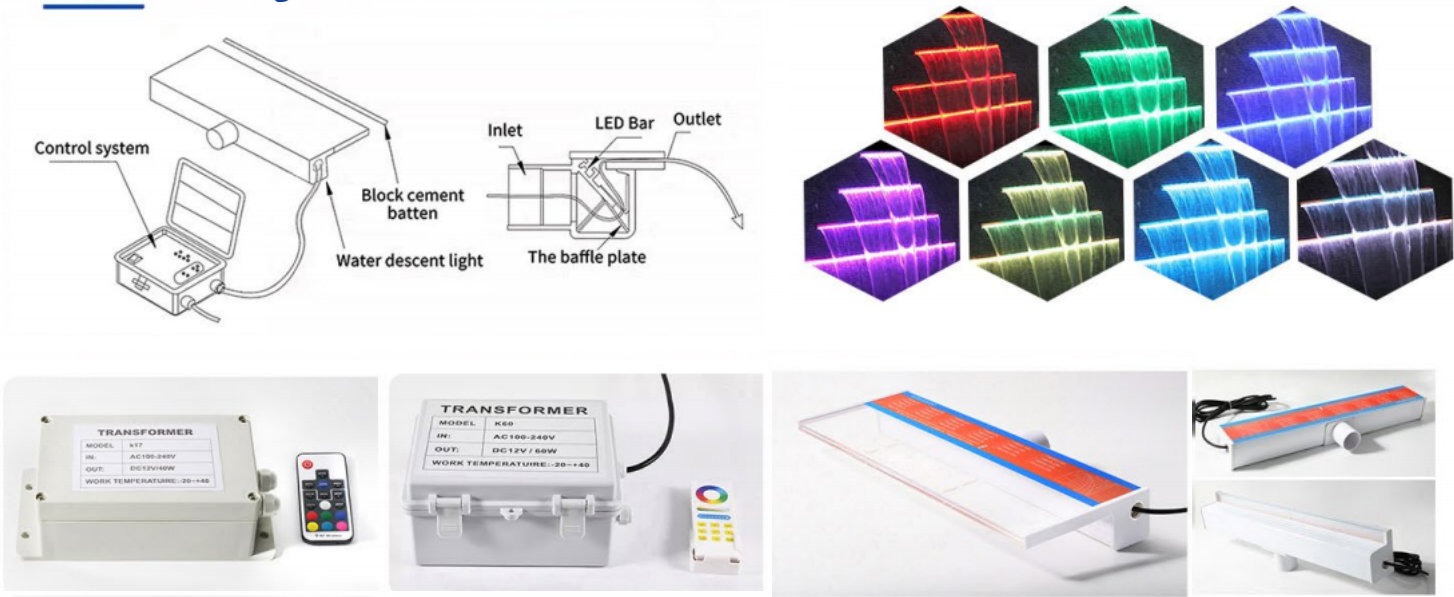

Model NO	Take Over Size mm		A mm	B mm	C mm	D mm	Power	Voltage
With LED light								
PB300-25(L)	1.5 inch	50mm	306	93	75	25	4W	DC12V
PB300-150(L)	1.5 inch	50mm	306	218	75	150	4W	DC12V
PB300-230(L)	1.5 inch	50mm	306	298	75	230	4W	DC12V
PB600-25(L)	1.5 inch	50mm	606	93	75	25	8W	DC12V
PB600-150(L)	1.5 inch	50mm	606	218	75	150	8W	DC12V
PB600-230(L)	1.5 inch	50mm	606	298	75	230	8W	DC12V
PB900-25(L)	1.5 inch	50mm	906	93	75	25	12W	DC12V
PB900-150(L)	1.5 inch	50mm	906	218	75	150	12W	DC12V
PB900-230(L)	1.5 inch	50mm	906	298	75	230	12W	DC12V
PB1200-25(L)	1.5 inch	50mm	1206	93	75	25	17W	DC12V
PB1200-150(L)	1.5 inch	50mm	1206	218	75	150	17W	DC12V
PB1200-230(L)	1.5 inch	50mm	1206	298	75	230	17W	DC12V
PB1500-25(L)	1.5 inch	50mm	1506	93	75	25	21W	DC12V
PB1500-150(L)	1.5 inch	50mm	1506	218	75	150	21W	DC12V
PB1500-230(L)	1.5 inch	50mm	1506	298	75	230	21W	DC12V

Without LED Light

PB300-25	1.5 inch	50mm	306	93	75	25	—	—
PB300-150	1.5 inch	50mm	306	218	75	150	—	—
PB300-230	1.5 inch	50mm	306	298	75	230	—	—
PB600-25	1.5 inch	50mm	606	93	75	25	—	—
PB600-150	1.5 inch	50mm	606	218	75	150	—	—
PB600-230	1.5 inch	50mm	606	298	75	230	—	—
PB900-25	1.5 inch	50mm	906	93	75	25	—	—
PB900-150	1.5 inch	50mm	906	218	75	150	—	—
PB900-230	1.5 inch	50mm	906	298	75	230	—	—
PB1200-25	1.5 inch	50mm	1206	93	75	25	—	—
PB1200-150	1.5 inch	50mm	1206	218	75	150	—	—
PB1200-230	1.5 inch	50mm	1206	298	75	230	—	—
PB1500-25	1.5 inch	50mm	1506	93	75	25	—	—
PB1500-150	1.5 inch	50mm	1506	218	75	150	—	—
PB1500-230	1.5 inch	50mm	1506	298	75	230	—	—